

Click for
Table of Contents



Contents



EdgeSwitch



Mounting Screws (Qty. 4)



Cage Nuts (Qty. 4)



Power Cord

Installation Requirements

- Phillips screwdriver
- Standard-sized, 19" wide rack with a minimum of 1U height available
- For indoor applications, use Category 5 (or above) UTP cabling approved for indoor use.
- For outdoor applications, shielded Category 5 (or above) cabling should be used for all wired Ethernet connections and should be grounded through the AC ground of the power supply.


We recommend that you protect your networks from harmful outdoor environments and destructive ESD events with industrial-grade, shielded Ethernet cable from Ubiquiti. For more details, visit: ui.com/toughcable



Note: Although the cabling can be located outdoors, the EdgeSwitch itself should be housed inside a protective enclosure.

Hardware Overview

Click for
Table of Contents

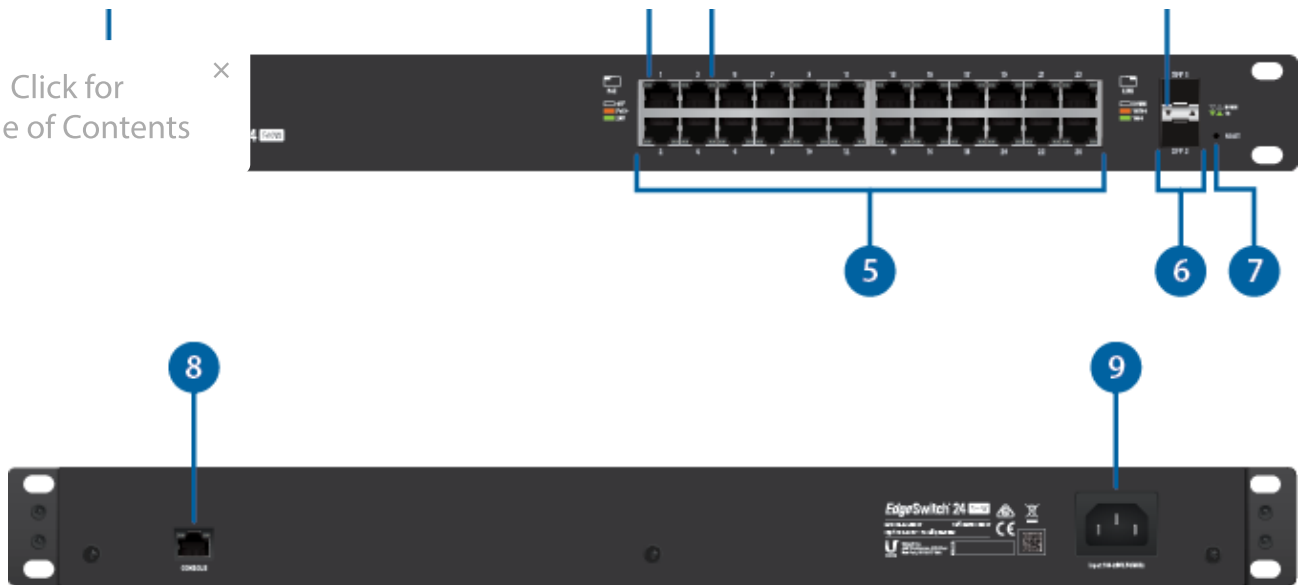

1 System LED



Note: The System LED functionality has been updated with firmware v1.8.0. We recommend that you update the EdgeSwitch to the latest firmware.

Flashing White	Bootup in progress.
White	Ready for use, not connected to Ubiquiti® Network Management System (UNMS™). See “UNMS Management” .
Blue	Ready for use, connected to UNMS.
Steady Blue with Occasional Flashing	Ready for use, unable to connect to UNMS, check connection to UNMS server.
Quickly Flashing Blue	Used to locate a device in UNMS.
Alternating Blue/White	Firmware upgrade in progress.

2 RJ45 PoE LED (Ports 1 - 24)

Off	No PoE
Amber	IEEE 802.3af/802.3at
Green	24V Passive

3 RJ45 Speed/Link/Activity LED (Ports 1 - 24)

Off	No Link
Amber	Link Established at 10/100 Mbps

Link Established at 1000 Mbps (1 Gbps)

Flashing Indicates Activity

 Click for
Table of Contents**4 SFP Speed/Link/Activity LED (Ports 1 - 2)**

Off

No Link

Green

Link Established at 1 Gbps

Flashing Indicates Activity

5 RJ45 (Ports 1 - 24)

RJ45 ports support Power over Ethernet (PoE) and 10/100/1000 Ethernet connections.

6 SFP (Ports 1 - 2)

Hot-swappable SFP ports support 1 Gbps connections.

7 Reset Button[Click here](#) to learn how to reset an EdgeSwitch to factory defaults.**8 Console Port**

RJ45 serial console port for Command Line Interface (CLI) management.

9 Power Port

Connect the included Power Cord to the Power port.

Hardware Installation

1.

Click for
Table of Contents

×




2.




OR

[Click for
Table of Contents](#)

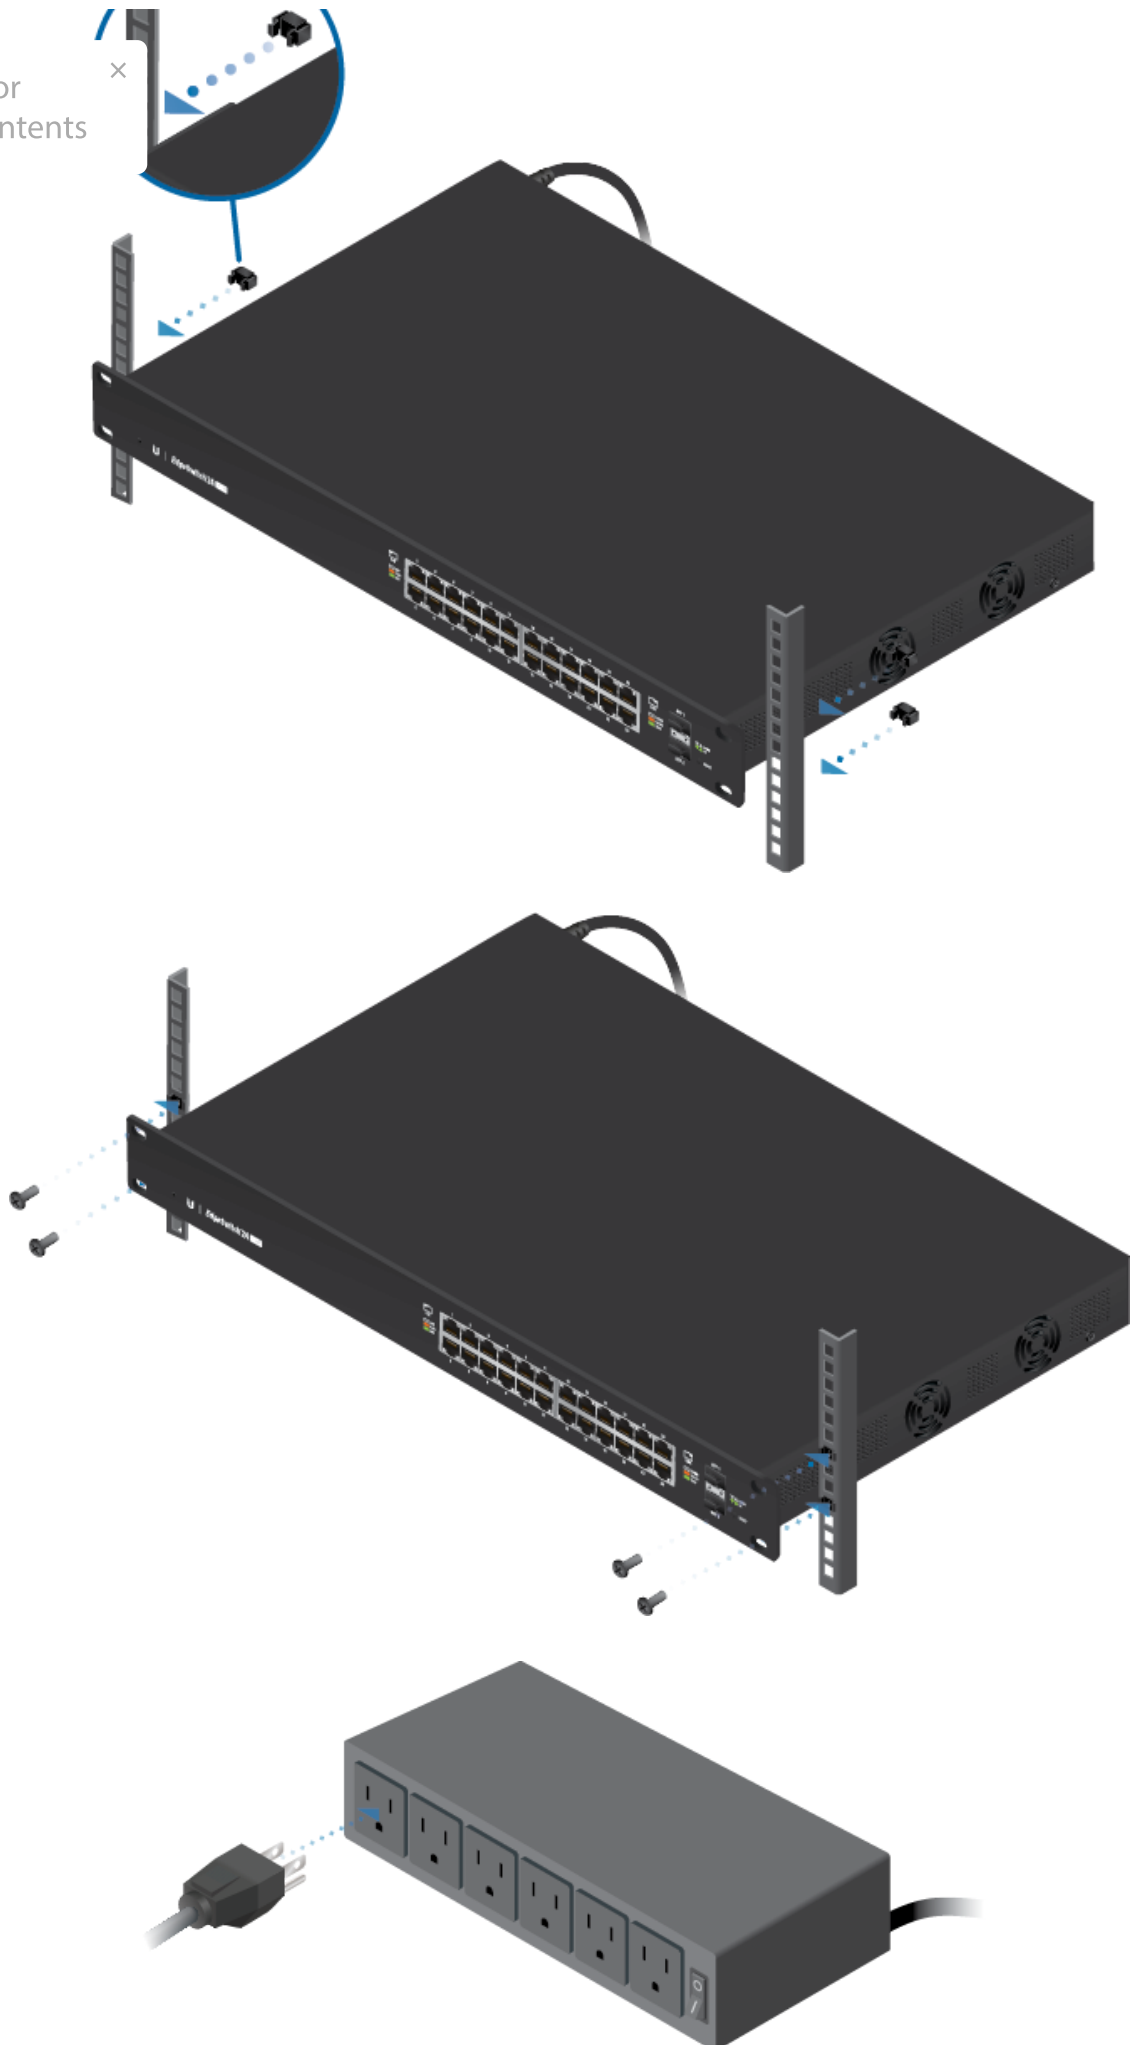

Click for
Table of Contents

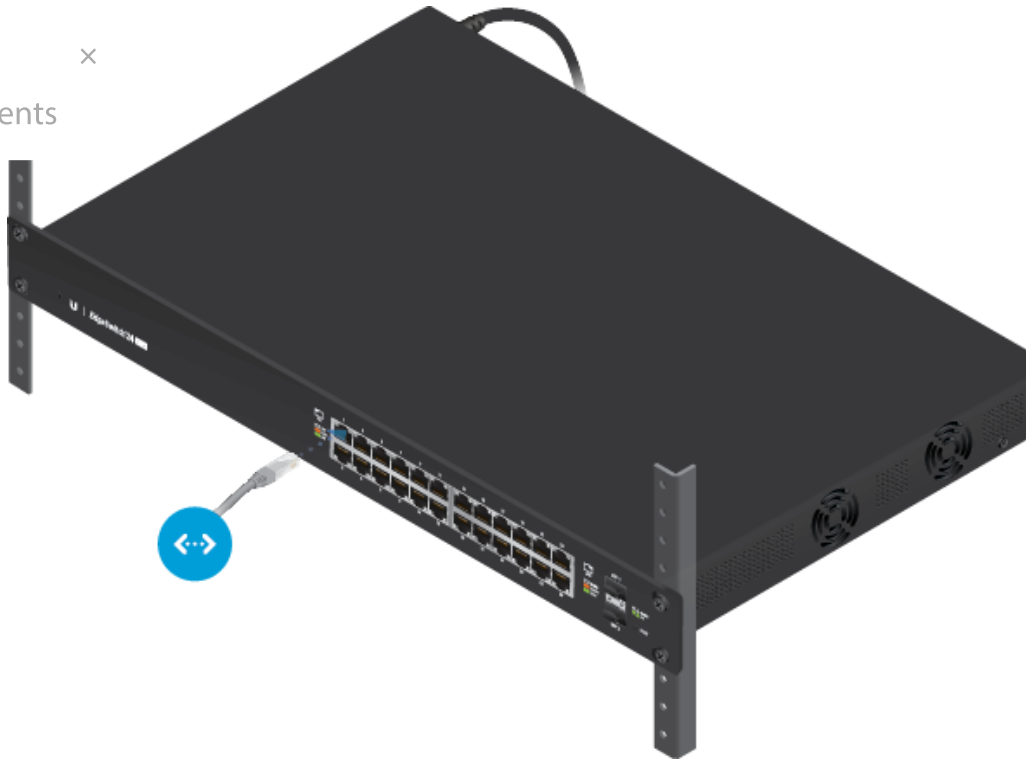

Note: The PoE settings for ports 1-24 are set to PoE+ auto by default, so 802.3af/at devices can be plugged in and automatically receive PoE. For instructions on how to enable 24V passive PoE, refer to [“Configuring PoE Settings”](#).

Connecting SFP

1.



2.



Click for
Table of Contents

3.



For information about compatible fiber SFP modules, visit:
ubnt.link/SFP_DAC_Compatibility

Accessing the Configuration Interface

The EdgeSwitch is set to DHCP by default, so it will try to automatically obtain an IP address. If that fails, then it will use the default fallback IP address, 192.168.1.2. Proceed to the appropriate section, DHCP or [“Fallback IP Address”](#):


DHCP

Use one of the following methods:


- Let the EdgeSwitch obtain an IP address and then check the DHCP server to see which IP Click for signed.

Table of Contents these steps:

1. Launch your web browser. Type the appropriate IP address in the address field. Press enter (PC) or return (Mac).
2. Enter ubnt in the Username and Password fields. Click Sign In.

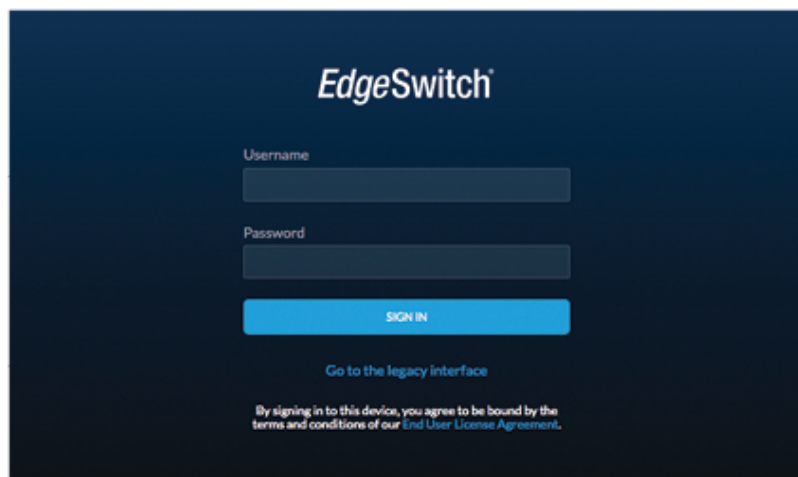

3. The EdgeSwitch Configuration Interface will appear. Customize additional settings as needed.

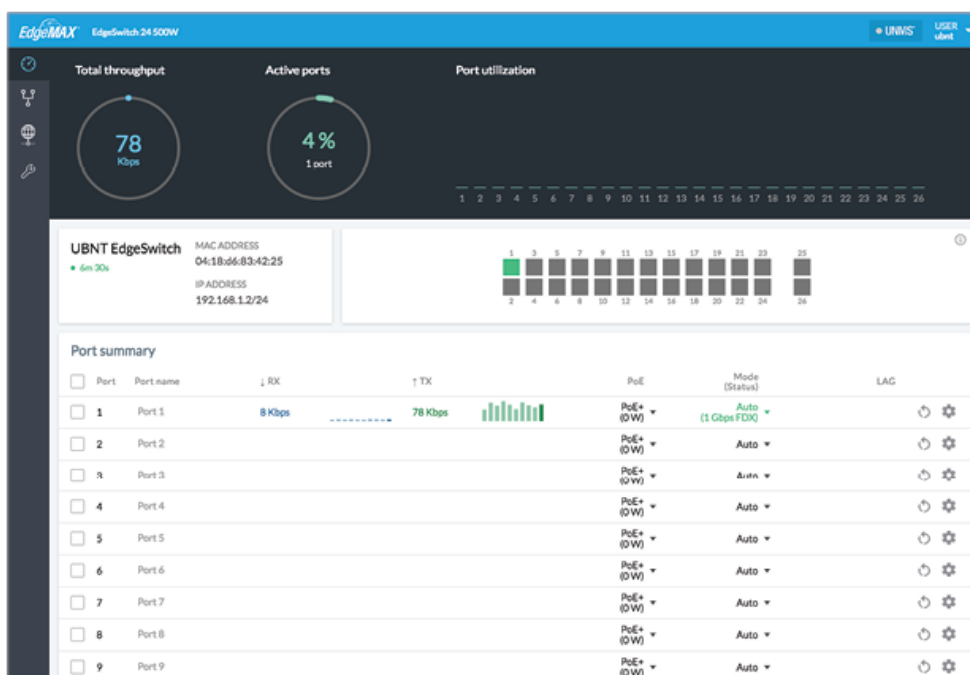


For more information on PoE configuration, refer to [“Configuring PoE Settings”](#). For more information, refer to the EdgeSwitch documentation, which is available at ui.com/download/edgemax


Fallback IP Address

1. Ensure that your computer (or other host machine) is connected to the EdgeSwitch.
2. Configure the Ethernet adapter on your host system with a static IP address on the 192.168.1.x subnet.


Click for
Table of Contents

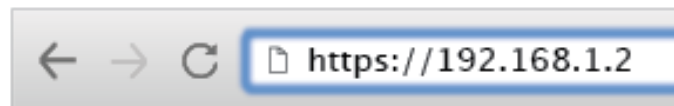

4. Enter ubnt in the Username and Password fields. Click Sign In.

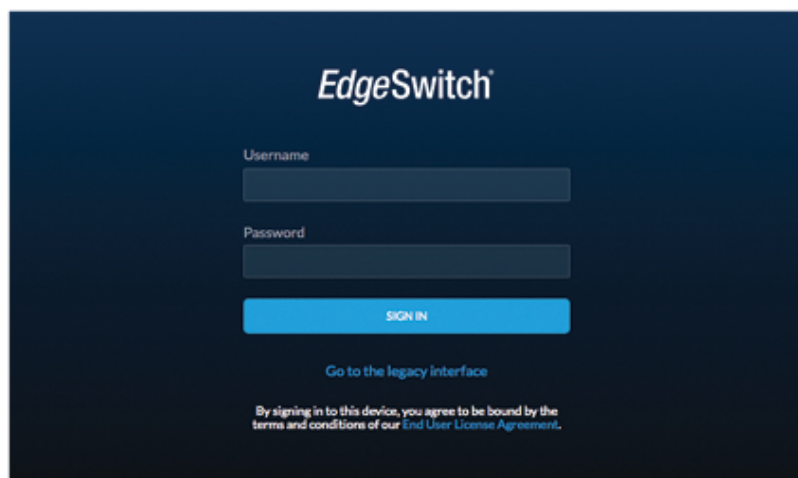

5. The EdgeSwitch Configuration Interface will appear. Go to Settings .

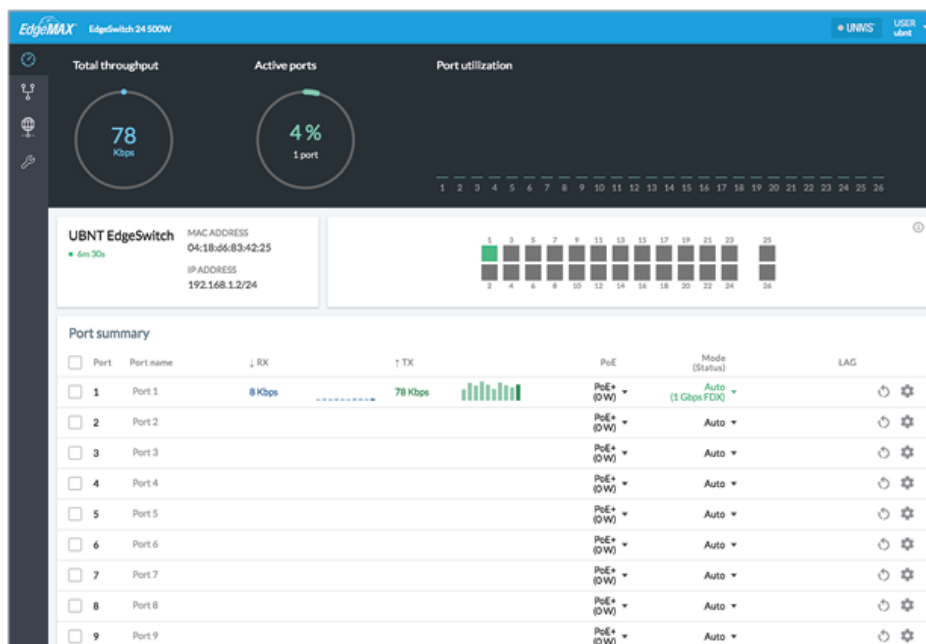

6. Change the IP Address to a unique IP address. Click Apply.

Click for
Table of Contents

The screenshot shows the configuration page for an EdgeSwitch. The interface is divided into several sections:

- Device name:** EdgeSwitch
- Network IP:**
 - Network mode: ☒ DHCP ☐ Static IP
 - IP Address: 192.168.1.2
 - Subnet mask: 255.255.255.0
 - Gateway IP: [empty]
 - Primary DNS: [empty]
 - Secondary DNS: [empty]
 - Management VLAN ID: 1
- IPv6:**
 - Network mode: ☒ Link-local ☐ DHCP ☐ Static IP
 - Stateless Address AutoConfig Mode: ☒ Enabled ☐ Disabled
 - IP address: fe80::a49e:7ff:fe93:4149/64
 - Gateway IP: [empty]
- Spanning Tree Protocol:**
 - Version: MSTP (802.1s)
 - Max age: 20
 - Hello time: 2
 - Forward delay: 15
 - Priority: 32768
- Services:**
 - UNMS: ☐ Disabled
 - Remote system log: ☐ Disabled
 - SSH server: ☒ Enabled
 - Telnet server: ☐ Disabled
 - Web server: ☒ Enabled
 - SNTP client: ☒ Enabled
- System actions:** Backup, Restore, and other icons.



Note: If you change the IP settings, then the session will be cut off, and you will need to reconnect to the EdgeSwitch using the new IP address.

Customize additional settings as needed. For more information on PoE configuration, refer to [“Configuring PoE Settings”](#).

UNMS Management

You can manage your device using UNMS, which lets you configure, monitor, upgrade, and back up your devices using a single application. Get started at www.unms.com

Configuring PoE Settings


The PoE settings for ports 1-24 are set to PoE+ by default, so 802.3af/at devices can be plugged in and automatically receive PoE.



WARNING: Before activating 24V passive PoE, ensure that the connected device supports PoE and the supplied voltage.

1. Go to Dashboard .
2. For the Ethernet port you want to configure, click the PoE drop-down menu.

Click for
Table of Contents

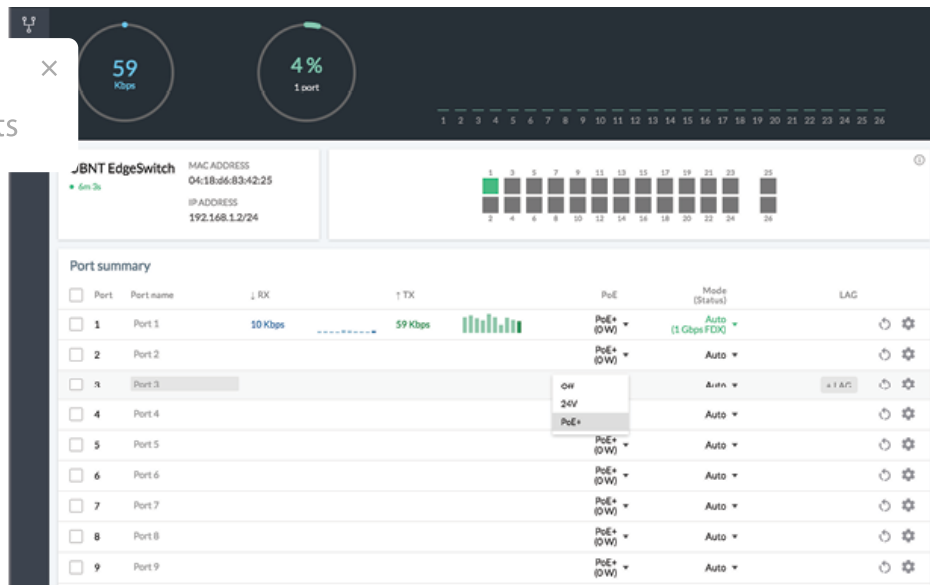

3. Select the appropriate mode: Off, 24V, or PoE+.

For more information, refer to the EdgeSwitch documentation, which is available at ui.com/download/edgemax

Specifications

ES-24-250W/ES-24-500W	
Dimensions	485 x 43.7 x 285.4 mm (19.09 x 1.72 x 11.24")
Weight	
ES-24-250W	4.7 kg (10.4 lb)
ES-24-500W	4.8 kg (10.6 lb)
Total Non-Blocking Line Rate	26 Gbps
Max. Power Consumption	
ES-24-250W	250W
ES-24-500W	500W
Power Method	100-240VAC/50-60 Hz, Universal Input
Power Supply	
ES-24-250W	AC/DC, Internal, 250W DC
ES-24-500W	AC/DC, Internal, 500W DC
LEDs Per Port	
Serial Console Port	N/A
RJ45 Data Ports	PoE, Speed/Link/Activity
SFP Data Ports	Speed/Link/Activity
Interfaces	
Networking Interfaces	(24) 10/100/1000 Mbps RJ45 Ethernet Ports (2) 1 Gbps SFP Ethernet Ports
Management Interface	(1) RJ45 Serial Port, Ethernet In/Out Band
Rack-Mount	Yes, 1U High
ESD/EMP Protection	Air: ± 24 kV, Contact: ± 24 kV
Shock and Vibration	ETSI300-019-1.4 Standard

Click for Table of Contents	Operating Temperature	5 to 95% Noncondensing
	× y	CE, FCC, IC

PoE Per Port	
PoE Interfaces	POE+ IEEE 802.3af/at (Pins 1, 2+; 3, 6-) 24VDC Passive PoE (Pins 4, 5+; 7, 8-)
Max. PoE+ Wattage per Port by PSE	34.2W
Voltage Range 802.3at Mode	50–57V
Max. Passive PoE Wattage per Port	17W
24V Passive PoE Voltage Range	20-27V

Safety Notices

1. Read, follow, and keep these instructions.
2. Heed all warnings.
3. Only use attachments/accessories specified by the manufacturer.



WARNING: Failure to provide proper ventilation may cause fire hazard. Keep at least 20 mm of clearance next to the ventilation holes for adequate airflow.



WARNING: To reduce the risk of fire or electric shock, do not expose this product to rain or moisture.



WARNING: Do not use this product in location that can be submerged by water.



WARNING: Avoid using this product during an electrical storm. There may be a remote risk of electric shock from lightning.

Electrical Safety Information

1. Compliance is required with respect to voltage, frequency, and current requirements indicated on the manufacturer's label. Connection to a different power source than those specified may result in improper operation, damage to the equipment or pose a fire hazard if the limitations are not followed.
2. There are no operator serviceable parts inside this equipment. Service should be provided only by a qualified service technician.
3. This equipment is provided with a detachable power cord which has an integral safety ground wire intended for connection to a grounded safety outlet.
 - a. Do not substitute the power cord with one that is not the provided approved type. Never use an adapter plug to connect to a 2-wire outlet as this will defeat the continuity of the grounding wire.
 - b. The equipment requires the use of the ground wire as a part of the safety certification, modification or misuse can provide a shock hazard that can result in serious injury or death.
 - c. Contact a qualified electrician or the manufacturer if there are questions about the installation prior to connecting the equipment.
 - d. Protective earthing is provided by Listed AC adapter. Building installation shall provide appropriate short-circuit backup protection.

Limited Warranty

Click for
Table of Contents [Warranty](#)

requires the use of arbitration to resolve disputes on an individual basis, and, where applicable, specify arbitration instead of jury trials or class actions.

Compliance

FCC

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions.

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operations of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

ISED Canada

CAN ICES-3(A)/NMB-3(A)

Australia and New Zealand



Warning: This equipment is compliant with Class A of CISPR 32. In a residential environment this equipment may cause radio interference.

CE Marking

CE marking on this product represents the product is in compliance with all directives that are applicable to it.



WEEE Compliance Statement

Declaration of Conformity

Online Resources

Click for
Table of Contents

