

Gigabit 24V PoE Injector

Product Overview

PT-PSE100G-24 is a single port PoE Injector. It provides 24Vdc, 1.1A power for remote PDs over 2 pairs output. It supports both 10/100 Base-T and Gigabit device. It works for 26W PoE PDs, such as wireless APs, Network cameras, IP Phones and other power Ethernet terminals.



PT-PSE100G-24

PT-PSE100G-24 is designed for indoor use. It works with wide input voltage of 100-240Vac. The effective distance is 100 meters over Cat5e/Cat6 cables.

Easy to install with two mounting hole.





Product Profile




- 1. Power Indicator
- 2. PoE Load Indicator
- 3. LAN: Data Input Port





- 4. PoE: Data & Power Output Port
- 5. AC Power Input
- 6,7. Mounting Hole

Product Working Diagram

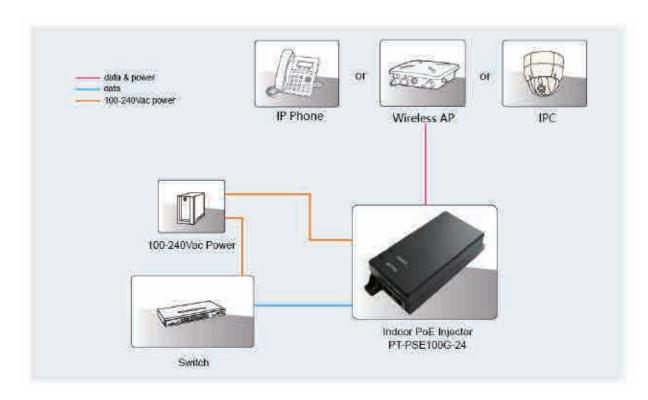

Specification

Standard

- IEEE802.3 10Base-T Ethernet
- IEEE802.3u 100Base-Tx Fast Ethernet
- IEEE802.3ab 1000Base-T Gigabit Ethernet
- RoHS Compliance
- WEEE Compliance

Input & Output

- Input :100-240Vac 1.0A 50/60Hz

Output: 24Vdc 1100mAPower Pins: 4/5(+), 7/8(-)Data Speed: 10/100/1000Mbps

Working Environment

- Operating Temperature: 0 °C to 40 °C

- Operating Humidity: 20% to 80%, non-condensation

- Storage Temperature: -20 °C to 70 °C

- Storage Humidity: 10% to 90%, non-condensation

- Operating Altitude: up to 2000meters

AC Surge Protection

- 1.0KV (5P/5N)
- L-N 1.2/50 (8/20) Tr/Th us
- 2.0KV (5P/5N)
- L-PE 1.2/50 (8/20) Tr/Th us
- N-PE 1.2/50 (8/20) Tr/Th us

Mechanical Characteristics

Case: PlasticColor: Black

- Mounting: Wall-mounted

- IP Rated: IP40

- Size: 134mm X 56mm X 33mm

- Weight: 150g

Safety Approvals

- CE

EMI

- FCC CFR47 Part 15, EN55024, EN55032

EMS


- IEC61000-4-2(ESD) ± 6kV(contact), ±8kV(air)
- IEC61000-4-3(RS) 10V/m(80MHz~2GHz)
- IEC61000-4-4(EFT) Power Port: ±2kV; Data Port:±1kV
- IEC61000-4-5(Surge) Power Port:±1kV/DM, ±2kV/CM
- IEC61000-4-6(CS) 10V(150kHz~80MHz)

Immunity

- IEC60068-2-6(Vibration)
- IEC60068-2-27(Impact)
- IEC60068-2-32(Free Fall)

LED Indicator

Power Indicator : GreenPoE Load Indicator : Green

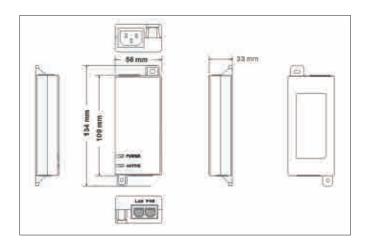

Order Info. PT-PSE100G -24

Packing. PT-PSE100G-24

Power Cord x 1 (Optional)

Manual x 1



This document belongs to PROCET company. It is not allowed to reproduce and modify without the original author's permission. It is PROCET's policy to improve its products as new technology, components, software, and firmware at any time. PROCET, therefore, reserves the right to change specifications without prior notice. (2019.05)

24Vdc/1.1A/1000Mbps/(4,5+,7,8-)